

**Estimation of Heat and Momentum Fluxes over Complex Terrain using a Large
Aperture Scintillometer**

A. Chehbouni ^{1*}, C. Watts ¹, J-P. Lagouarde ², Y.H. Kerr ³, J-C. Rodriguez ¹, J-M.
Bonnetfond ², F. Santiago ¹, G. Dedieu ³, D. C. Goodrich ⁴ and C.Unkrich ⁴

¹ *IRD/IMADES*

*Reyes & Aguascalientes Esq., Col San Benito,
Hermosillo, CP. 83190, Sonora, Mexico*

² *INRA-Bioclimatologie, Bordeaux, France*

³ *CESBIO, Toulouse, France*

⁴ *USDA-ARS, Tucson, AZ, USA*

*

* Permanent address: CESBIO: (CNES-CNRS-IRD-UPS), 18 Av. E. Belin, 13401,
Toulouse 4, France, Fax (33) 5 61 55 85 01, Email:ghani@cesbio.cnes.fr

Abstract

A comprehensive experimental plan has been designed to further investigate the potential and the limitations associated with the use of a large aperture scintillometer (LAS) to infer path average sensible and momentum fluxes over complex surfaces as part of the Semi-Arid Land-Surface-Atmosphere (SALSA) Program. The complexity of the terrain is associated with the type and the cover of the vegetation canopy as well as with changes in topography. Scintillometer based estimates of sensible heat flux and friction velocity are compared to those measured by eddy correlation systems over a grassland patch, a mesquite patch, and over a transect spanning both patches. The results show that considering the complexity of the surface, the overall performance of the scintillometer is relatively good.

Keywords: Area-average sensible heat flux, effective parameters, scintillometer, eddy covariance.

1. Introduction

The impact of spatial variation in surface fluxes on regional scale atmospheric flow and potential feedback to land-surface processes has been a major issue in the scientific community during the past two decades. This has been translated into the coordination, under the umbrella of international programs such as GEWEX, BAHC, and ISLSCP, of several large-scale multidisciplinary field experiments (LSMFE) at different sites all over the world. All these experiments involved measurements of water, heat, and momentum fluxes at the land surface atmosphere interface, through a network of point-sampling measurement devices using Bowen ratio or Eddy correlation techniques. In addition to these point-sampling measurements, some of these LSMFEs also involved methods to measure the spatial variation of turbulent surface flux using aircraft and LIDAR (FIFE, HAPEX-MOBILHY, HAPEX-Sahel, and SALSA). However, due to their high price and the requirement for continuous availability of well-trained staff to operate and maintain them, these devices might not be the best choice to fulfill the much-needed long-term measurements of surface fluxes to validate large-scale hydro-atmospheric models. It is therefore important to seek alternative approaches that allow for low-cost and low-maintenance observations of surface fluxes.

Several studies carried out in the past decade have revealed that the scintillation method is a promising approach for routine observations of surface convective fluxes over path lengths of several kilometers (Kohsiek, 1985 and 1987; De Bruin et al. 1995;

McAneney et al. 1995; Green et al. 1994; Lagouarde et al. 1996; Hartogensis, 1997; Chehbouni et al. 1999). It is not our aim in this paper to provide a detailed overview of this technique, this has been done elsewhere. For detailed information, the reader can refer to a comprehensive review by Hill (1992). Briefly, the principle of the scintillometer consists of transmitting a beam of electromagnetic radiation and measuring the intensity variations of the received signal. This leads to a direct measure of the strength of the refractive index of the air and then to the structure parameter for the refractive index (C_n^2), which can then be related to the structure function parameter of temperature (C_T^2) to derive sensible heat flux.

The objective of this study is to use a Large Aperture Scintillometer (LAS) to estimate area-averaged sensible heat flux and friction velocity over complex surfaces. The complexity of the surface is due to heterogeneity of vegetation type and cover as well as to variability of surface topography. Scintillometer-based sensible heat flux values are compared to those measured using eddy correlation techniques during the 1998 SALSA campaign in Mexico. This paper is organized as follow: in section (2), we present the basic equations and hypotheses that allow estimation of sensible heat flux and friction velocity from of refractive index of the air; in section (3), we describe the experimental design; in section (4), we present a comparison of sensible heat flux and friction velocity measured by eddy correlation to that derived from the scintillometer. Then, we conclude by discussing the potential and the limitations of the scintillometer technique over complex terrain.

2. Physical background

Based on Tatarskii's (1961) theory, Clifford *et al.* (1974) showed that, for a Large Aperture Scintillometer (LAS), the variance of the natural logarithm of the irradiance I incident at the receiver is:

$$\mathbf{s}_{\ln(I)}^2 = \overline{[\ln(I) - \overline{\ln(I)}]^2} = \int_0^1 C_n^2(u) W(u) du \quad (1)$$

where the overbar represents a spatial average, $W(u)$ is a spatial weighing function, given by :

$$W(u) = 16 \mathbf{p}^2 k^2 L \int_0^\infty K \Phi_n(K) \sin^2(K^2 Lu(1-u)/2k) [2J_1(x)/x]^4 dK \quad (2)$$

where $u = \frac{x}{L}$ is the normalized pathlength; L is the pathlength; $k=2\pi/\lambda$ is the optical wave number; $x=KDu/2$, where D is the receiver/transmitter aperture; K is the three-dimensional spatial wave number; J_1 is a Bessel function of the first kind of order one; and Φ_n , the three-dimensional Kolmogorov spectrum of the refractive index describes the turbulent medium in terms of its Fourier components K :

$$\Phi_n(K) = 0.033 C_n^2 K^{-11/3} \quad (3)$$

After integrating Eq. (2), and using Eqs. (1) and (3), C_n^2 can be obtained as a linear function of $S_{\ln(l)}^2$, measured by the scintillometer as:

$$C_n^2 = C S_{\ln(l)}^2 D^{7/3} L^{-3} \quad (4)$$

where $C=1.12$ for C_n^2 ranges from 10^{-17} to $10^{-12} \text{ m}^{-2/3}$

The spatially averaged refractive index structure parameter obtained by the scintillometer (C_n^2) is related to the temperature structure parameter (C_T^2) as:

$$C_T^2 = C_n^2 \left(\frac{T^2}{-0.78 \cdot 10^{-6} P} \right)^2 \left(1 + \frac{0.03}{\mathbf{b}} \right)^{-2} \quad (5)$$

where \mathbf{b} is the Bowen ratio which is incorporated as a humidity correction such that C_T^2 decreases with increasing evaporation rate. The study by De Wekker (1996) showed that this term can be safely neglected whenever the Bowen ratio is greater than 0.6, which is generally the case over most natural surfaces in arid and semi-arid areas. The sensible heat and momentum fluxes together determine atmospheric stability, and this in turn influences turbulent transport, thus an iterative procedure is needed to calculate sensible heat flux from the scintillometer measurement (Lagouarde et al. 1996), as follows.

We first define the dimensionless temperature scale T^* as :

$$T^* = H / \rho c_p u^* \quad (6)$$

where ρ is the density of the air, c_p is the heat capacity at constant pressure, and u^* is the friction velocity given from:

$$u^* = \frac{ku}{\ln\left(\frac{z-d}{z_0}\right) - \psi_m\left(\frac{z_0}{L_{mon}}\right)} \quad (7)$$

where z is the measurement height, z_0 is the roughness length, d is the displacement height; ψ_m is the integrated stability function, and L_{mon} is the Monin-Obukhov length defined as:

$$L_{mon} = \frac{T u_*^2}{k g T_*} \quad (8)$$

Under unstable conditions, De Bruin et al. (1993 and 1996) found that the temperature structure parameter C_T^2 and T_*^2 are related by:

$$\frac{C_T^2 (z-d)^{2/3}}{T_*^2} = 4.9 \left(1 - 9 \frac{z-d}{L_{mon}} \right)^{-2/3} \quad (9)$$

Sensible heat flux can then be derived using Eqs. (5-9) via a simple iterative procedure.

This approach has been successfully tested over homogeneous and flat terrains where the needed roughness length and displacement height can be easily estimated using a rule of thumb assumption. The case of heterogeneous surfaces requires an appropriate method to estimate their effective values. Additional difficulty appears if the surface presents heterogeneity in topography. As shown in Equation (9), T_*^2 scales as $z^{2/3}$, therefore the scintillometer height needs to be accurately estimated (see below).

3. Experimental Design

3.1. Site Description

This study was conducted in the Mexican portion of the Upper San Pedro Basin (USPB) as part of the Semi-Arid-Land-Surface-Atmosphere Program (Goodrich et al. 1998). Unlike the American part of the basin, a large portion of the Mexican part is still covered by native grassland. However, the land in Mexico is experiencing the same degradation processes that took place in the United States a century ago. Using historical LANDSAT Multi-spectral images, Kepner et al. (1999) showed that grassland and desertscrub covered areas are very vulnerable to encroachment of woody shrubs i.e., Mesquite. This study reveals that the grassland areas have significantly decreased. In this context, the objective of the investigation in the Mexican part of the basin is to better understand ecosystem function, and document the impact of land degradation

on surface-atmosphere interactions and the hydrological cycle. Two main sites representing two extreme stages of degradation were heavily instrumented: healthy grassland, representing a pre-degradation situation (Zapata1) and a mesquite site representing the ultimate stage of degradation. Besides these two main sites, two additional sub-sites were also instrumented for a short period: another healthy grassland at the beginning of 1998 season (Zapata 2) and a degraded grassland site toward the end of the growing season (See Figure 1 for a location map).

3.2. Instrumentation

In this specific study, data over the mesquite and the degraded grassland sites are used. The Mesquite (*Prosopis velutina*) site is situated within the Morelos ranch about 5 kilometers West of Zapata village. The average surface cover of the mesquite was about 30 % and the average mesquite height was about 4.2 m. A 12 meter meteorological tower equipped with a set of standard meteorological instruments to measure the air temperature, relative humidity, incoming solar radiation, wind speed, wind direction, and precipitation was set up. These standard meteorological measurements were sampled every ten seconds and an average measurement recorded every 30 minutes. Net radiation (Q-7), outgoing short wave (Kipp), and surface temperature (Everest-IRT) were measured separately over bare soil and over the vegetation. Soil heat flux was measured using 6 HFT3 plates (REBS Inc., WA, USA), soil temperature and soil moisture were measured at different depths using 6 108 temperature probes and 6 CS600 TDR (Time Domain Reflectometer) probes

respectively (Campbell Scientific Inc., USA). Sensible, latent, and momentum fluxes were measured using a 3D sonic anemometer, a fast response (fine wire) thermocouple and a fast response hygrometer (Campbell Scientific Inc., USA).

The degraded grassland site is adjacent to the mesquite. The vegetation cover was sparse, about 35 % in the grassland (*Bouteloua*). The average grass height was about 0.25 m and the Leaf Area Index was approximately 0.3 (Chehbouni et al. this issue). A three-meter tower equipped with standard meteorological sensors was erected over this land cover. These included measurements of incoming and net radiation, air temperature and humidity, wind speed and direction, and surface temperature. Additionally, soil moisture and temperature, and soil heat flux were measured at different depths. The sensible heat flux was measured using a 3D sonic anemometer (Applied technology, Co, USA). The sonic data were then post-processed using a procedure developed in the context of the EURO-FLUX consortium (means and second moments were computed and coordinate rotation was performed). At the end of the experiment, an inter-comparison over a homogeneous grassland site was made between this sonic anemometer and the one used over the mesquite has been made (Chehbouni et al., this issue).

The Large Aperture Scintillometers used in this study were built at the Department of Meteorology of the Wageningen Agricultural University (WAU). The basic design is described in Ochs and Wilson (1993), but the WAU has improved the electronics. The LAS has an aperture size of 0.15 m and the light source is a light

emitting diode (LED: TIES-16A, Texas Instruments, Texas, USA) operating at a peak wavelength of 0.94 μm , which is placed at the focal point of a concave mirror. The receiver also employs an identical mirror to focus light on a photo diode detector. To distinguish the light emitted by the LAS from ambient radiation it is excited by a 7 kHz square wave. Scintillations appear as amplitude modulations on the carrier wave. For beam alignment, telescopic rifle sights are mounted on both the receiver and emitter housings. The receiver electronics have been designed in such a way that after setting the path length, the output voltage can be used to estimate C_n^2 using $C_n^2 = 10^{(V_{out}-12)}$, where V_{out} is the output voltage of the scintillometer (using Eq. 4). 15 minute values of the scintillometer output (V_{out}) were stored on a data logger. After downloading of these data, 30 minutes averages were computed to allow direct comparison with sonic anemometer data.

The three scintillometers were first inter-calibrated over a grassland site: Zapata 2 (Lagouarde et al. this issue). The original experimental plan was to deploy the first scintillometer over the degraded grassland site, the second over the adjacent mesquite site, and the third over a transect spanning both sites. However, due to the failure of one scintillometer, this original design had to be modified and one scintillometer was deployed over the entire transect from Day Of the Year (DOY) 265 to DOY 277. The receiver was installed on the meteorological tower in the mesquite site at a height of 8.73 m above the ground. The transmitter was installed on a tower at a height of 3.47 m above the ground at the other end of the transect. The total pathlength was of 1829 m made up of about 55 % mesquite and 45% grass. The second scintillometer was

installed alternatively over the grass and over the mesquite. When deployed over the mesquite (DOY 265 to DOY 274), the transmitter was installed on the meteorological tower at a height of 9.61 m and the receiver was installed on another tower situated at the transition of mesquite/grass zone about one kilometer apart at a height of 9.41m. When deployed over the grass (DOY 274 to DOY 277), the transmitter was installed at the transition of the mesquite/grass zone on a tower at a height of 3.47 m and the receiver was installed about 826 m apart at a height of 3.41m. In Figure 2, the position of the scintillometer towers along with the spatial variation of the surface across the entire transect is presented.

4. Results

4.1 Estimation of effective scintillometer height

The height of the scintillometer beams needs to be accurately estimated since T^* scales as $z^{2/3}$ (Equation 9). This issue is complicated here since the surface presents a large gradient in topography (Figure 2). It is well recognized that the presence of hill can affect temperature and humidity fields in the atmospheric boundary layer by changing the boundary conditions at the earth's surface and by changing the mixing processes that control the temperature and humidity profiles above the surface. Additionally, the presence of a hill can affect the wind field and the turbulence above the surface. In the present study, the hill is small enough (less than 100 meters) so that

the perturbations due to topography variation on atmospheric variables might be safely neglected (Raupach et al. 1987).

For practical reasons, the transmitter and the receiver were not at the same height for all three setups. This means that the height of the scintillometer beam above the surface varies along the path. Consequently, C_n^2 , and therefore C_T^2 are not only averaged horizontally but vertically as well. In this study a heuristic approach (method 1) has been used to derive an effective scintillometer height. It consists of assuming that sensible heat flux can be formulated using the free convection formula and is constant in the surface layer. In this case, C_n^2 as well as C_T^2 scale as $(z-d)^{-4/3}$ (Hartogensis, 1997). This leads to the following equation, which can be numerically integrated to derive the effective scintillometer height:

$$\langle z-d \rangle^{-4/3} = \int_0^1 (z_u - d_u)^{-4/3} W(u) du \quad (10)$$

where z_u is the difference between the elevation of the scintillometer beam and the ground surface and d_u is the displacement height both defined at the normalized pathlength u .

In the case of a homogeneous vegetation type, d and z_o are obtained as fractions of vegetation height using rule of thumb assumptions. Over heterogeneous surfaces (i.e., transect of two patches), effective displacement height and effective roughness

length are obtained following Shuttleworth et al. (1997) and Chehbouni et al. (1999) as:

$$d = \sum_i w_i d_i \quad \text{and} \quad \ln^{-2} \left(\frac{z_b - d}{z_o} \right) = \sum_i w_i \ln^{-2} \left(\frac{z_b - d_i}{z_{oi}} \right) \quad (11)$$

where z_{oi} and d_i are the patch scale roughness length and displacement height, respectively, which, w_i is the fraction of the surface covered by the patch i , and z_b is the blending height which is expressed as a function of the friction velocity, wind speed, and horizontal length scale (Wieringa, 1986).

4.2 Validation and discussion

4.2.1. Validation over individual patches

Comparison between half-hour averages of the momentum flux (τ) obtained from eddy correlation and the combination of the scintillometer and mean wind speed measurements are shown in Figure 3 and Figure 4 for the degraded grassland and mesquite sites, respectively. It is clear that the scintillometer overestimates the momentum flux especially over the mesquite patch. The linear regression analysis leads to a slope of 1.16 (1.35) and R^2 of 0.93 (0.89) and a standard error of 0.05 (0.09) Nm^{-2} for the grass patch (mesquite patch). The corresponding sensible heat flux comparisons are presented in Figure 5 for the degraded grassland and in Figure 6 for the mesquite. The over-estimation reported in τ translates into an over estimate of

sensible heat flux. Nevertheless, the Root Mean Squared Error between eddy correlation and the scintillometer-based estimates of sensible heat flux were 30 Wm^{-2} over the grass and 40 Wm^{-2} over the mesquite, respectively. The overestimation of both τ and H can be explained by several factors. First, the cup anemometers are known to over estimate wind speed, and therefore the simulated τ and H might be overestimated (Hill et al. 1991). Second, data in this comparison represent all wind directions including some periods, though not very often, when the wind blew down the scintillometer path. Third, the large difference in the elevation-height between the receiver and the transmitter on each patch may affect the representativeness of wind speed and air temperature estimates made over the corresponding eddy correlation tower. Despite the visual impression of homogeneity, field survey indicated that there was a patch of bare soil located far enough from the micrometeorological tower so that it contributes less to the eddy correlation measurements than to the scintillometer measurements. Similarly, the mesquite height and cover was less important toward the grass-mesquite transition zone, therefore, the average vegetation height, from which roughness length and displacement height are computed, may not be representative of the entire scintillometer path. More importantly, the specific area of the surface to which the eddy covariance flux corresponds expands or contracts, elongates or widens with different conditions of stability and wind speed, while the weighting function of the LAS do not vary with wind speed and direction (Eq. 2).

4.2.2. Validation over the transect

Eddy correlation based values of area-average sensible heat and momentum fluxes (H and τ) were obtained by weighting the measurements of sensible heat flux and momentum flux made over the grass and over the mesquite by the scintillometer spatial weighing function $W(u)$. Comparison between scintillometer and eddy-correlation based estimates of area-average momentum flux is presented in Fig. 7. The corresponding comparison of area-average sensible heat flux values is presented in Fig. 8. The RMSE between observed and simulated values was about 21 Wm^{-2} for the area-average sensible heat flux and 0.04 Nm^{-2} for area-average τ .

It can be clearly concluded that the performance of the scintillometer over the transect is much better than that observed over the individual patches. This behavior can be explained by two reasons. Measurements of sensible heat flux and momentum flux over each patch were weighted according to the scintillometer spatial response function. This certainly improves the spatial correspondence between the LAS and the 3D-sonic measurements, while over the individual transect the spatial correspondence of the 3Ds and LAS measurements may not be fulfilled. On the other hand, the scintillometer setup over the individual patches leads to an important variation of the height of the scintillometer beam along the path. This situation might not be appropriate for the application of Monin-Obukhov similarity theory.

In order to investigate the sensitivity to the value of the effective scintillometer height, sensible heat flux estimated using the method described above (method 1) are compared to those obtained using two other methods. The second method (method 2)

consists of ignoring the topographic variation of the terrain to derive an effective scintillometer height as the average of the receiver and the scintillometer heights. The third method (method 3) consists of deriving an effective height from a line average of (z-d). In Table 1a, the values of effective scintillometer height associated with each method, the corresponding time average value of sensible heat flux as well as the result of the linear regression between measured and simulated heat flux values over the degraded grass patch are presented. Table 1b and 1b present the same results for the mesquite patch and for the entire transect, respectively. These tables confirm that the average scintillometer-based values of sensible heat flux increase significantly with the height. They also imply that over complex terrains, the scintillometer height as well as the topographic variation along the scintillometer path must be accurately estimated.

It is also important to emphasize that over heterogeneous surfaces, one must seriously consider the issue of sampling and scale when validating scintillometer measurements. In addition to the classical $W(u)$ function, the weighing should, in principle, also include a dependence on wind speed and wind direction. In fact there is a need for a two dimensional, time dependant weighing function which takes into account the spatial and temporal variations of the relative contribution of individual patches (here grass and mesquite) to the scintillometer measurements. However, the use of such complex procedure may not be very useful in this particular study since the wind direction was constantly blowing across the scintillometer path. The size of individual patches (1x1 kilometers for the grass and for the mesquite) and the setup leads to large fetches. Additionally, the scintillometer pathlength was large (about 2 km) and consisted of about equal proportion of grass and mesquite.

5. Conclusions

Several successful studies have investigated the use of scintillometer in estimating area-average sensible heat flux over homogeneous surfaces. The objective of this study was to test the performance of the scintillometer over surfaces characterized with heterogeneity in both vegetation type and cover and in topography. The results indicate that by properly taking into account the effect of surface heterogeneity due to both vegetation and topographic variations along the scintillometer path, the overall agreement between the measured and simulated quantities is fairly good. In spite of some quantitative uncertainties, this study demonstrates the great value of scintillometer measurements for the determination of the turbulent fluxes of heat and momentum over heterogeneous surfaces. Scintillation techniques have several advantages over *in-situ* techniques. Scintillation is generally not very sensitive to turbulence in the immediate vicinity of the transmitter or receiver. Therefore measurements can be made with minimal disruption by the instrument. More importantly, scintillation measurements inherently represent an average over the path. This reduces the question of representativeness of *in-situ* measurements. Furthermore, scintillation measurements are ideal for long-term monitoring over spatial scales relevant to atmospheric models and remote sensing observations. However, additional investigations are needed to understand the scintillometer measurements over transect of small surfaces where the sign of the heat flux changes along the scintillometer path. In this case, one has to be very careful in interpreting the scintillometer measurements.

This will required a detailed footprint analysis and a two dimensional, time dependant weighing function which takes into account the spatial and temporal variations of the relative areas contributing to the scintillometer signal.

Acknowledgments

We acknowledge financial support from IRD, CONACyT, the French Remote Sensing Program: PNTS, and the European Commission through VEGETATION projects. This research is situated within the framework of NASA Mission to Planet Earth (MTPE): NASA/EOS grant NAGW2425. Additional support was also provided by the USDA-ARS Global Change Research Program and NASA grant W-18-1997. The assistance of P. Cayrol, G. Boulet, and Mario Garcia during the course of the field experiment is gratefully acknowledged. Many thanks to Drs J.W. Shuttleworth and H.A.R. De bruin for their helpful comments on the manuscript.

References

- Chehbouni A., Kerr, Y.H., Watts, C., Hartogensis, O., Goodrich, D.C., Scott, R., Schieldge, J., Lee, K., Shuttleworth, W.J., Dedieu, G. and De Bruin, H.A.R., 1999. Estimation of area- average sensible heat flux using a large aperture scintillometer, *Water Resour. Res.*, 35 (8): 2505-2512.
- Chehbouni A., Watts, C., Kerr, Y.H., Dedieu, G., Rodriguez, J-C, Santiago, F., Cayrol, P., Boulet, G. and Goodrich, D., 2000. Methods to aggregate turbulent fluxes over heterogeneous surfaces: Application to SALSA data set in Mexico, *Agricultural Forest Meteorol.*, this issue.
- Clifford, S.F., Ochs, G.R. and Lawrence, R.S., 1974. Saturation of optical scintillation of strong turbulence, *J. Opt. Soc. Am.*, 64:148-154.
- De Bruin, H.A.R., Kohsiek, W., and van den Hurk, B.J.J.M., 1993. A verification of some methods to determine the fluxes of momentum, sensible heat, and water vapor using standard deviation and structure parameter of scalar meteorological quantities. *Boundary-Layer Meteorol.* 63: 231-257.
- De Bruin, H.A.R., van den Hurk, B.J.J.M. and Kohsiek, W., 1995. The scintillation method tested over a dry vineyard area. *Boundary- Layer Meteorol.* 76:25-40.
- De Bruin, H.A.R., Nieveen, J.P., de Wekker, S.F.J. and Heusinkveld, B.G., 1996. Large

aperture scintillometry over a 4.8 km path for measuring areally-average sensible heatflux. Proc. 22nd AMS Symposium on Agricultural and Forest Meteorology, 28 January-2 February, Atlanta, Georgia, USA.

De Wekker, S.F.J., 1996. The estimation of areally-averaged sensible heat fluxes over complex terrain with a Large-Aperture Scintillometer, M.S. thesis. Dept. of Meteorology, Wageningen Agricultural University. 42pp.

Goodrich, D.C., Chehbouni A. and 29 Co-authors., 1998. An overview of the 1998 activities of the Semi-Arid Land-Surface Program, in Proceeding of the 1998 American Meteorological Society meeting, Jan. 1998, Pheonix, AZ, pp1-7.

Green, A.E., McAneney, K.J. and Astill, M.S., 1994. Surface-layer scintillation measurements of daytime sensible and momentum fluxes, *Boundary-Layer Meteorol.*, 68:357-373.

Hartogensis, O., 1997. Measuring areally-averaged sensible heat fluxes with a Large Aperture Scintillometer, M.S. Thesis, Department of Meteorology Agricultural University of Wageningen the Netherlands.

Hill, R.J., Ochs, F.R. and Wilson, J.J., 1991. Measuring surface-layer fluxes of heat and momentum using optical scintillation, *Boundary-Layer Meteorol.*, 58:391-408.

Hill, R.J., 1992. Review of optical scintillation methods of measuring the refractive-index spectrum, inner scale and surface fluxes. *Waves in Random Media*, 2:179-201.

Kepner, W.G., Watts, C., Edmonds, C.M., Van Remortel, R.D. and Hamilton, M.E., 1999. A Landscape Approach for Detecting and Evaluating Change in a Semi-arid Environment. *Journal of Environmental Monitoring and Assessment*, In press

Kohsiek, W., 1985. A comparison between line-averaged observations of C_n^2 from scintillation of a CO₂ laser beam and time averaged in situ observations. *J. Clim. and Appl. Meteorol.*, 24:1099-1102.

Kohsiek, W., 1987. A 15 cm aperture LED scintillometer for C_n^2 and crosswind measurements. *KNMI Scientific Reports WR 87-3*.

Lagouarde, J.P, McAneney, K.J. and Green, E.F., 1996. Scintillometer measurements of sensible heat flux over heterogeneous surfaces, In *Scaling up in hydrology using remote sensing* J.B. Stewart, E.T. Engman, R.A. Feddes and Y. Kerr (eds.),147-160, John Wiley and sons, Chichester.

- Lagouarde, J-P., Chehbouni, A., Bonnefond, J-M, Rodriguez, J-C., Kerr, Y.H., Watts, C. and Irvine, M., 1999. Analysis of the limits of the C_T^2 -profile method for sensible heat flux measurements. *Agricultural and Forest Meteorol.* this issue.
- McAneney, K.J., Green, A.E. and Astill, M.S., 1995. Large aperture scintillometry: The homogenous case. *Agricultural and Forest Meteorology.* 76:149-162.
- Ochs, G.R. and Wilson, J.J., 1993. A second-generation large-aperture scintillometer, NOAA Tech. Memo, ERL WPL-232, NOAA Environmental Research Laboratories, Boulder, Co.
- Raupach, M.R., Weng, W.S., Carruthers, D.J and Hunt, J.C.R., 1987. Temperature and humidity fields and fluxes over low hills. *Q.J.R. Meteorol. Soc.*, 118:191-225.
- Schmid, B, and Lloyd, C.R., 1999. Spatial representativeness and the location bias of flux footprints over inhomogeneous areas. *Agricultural And Forest Meteorol.*, 93:195-209.
- Shuttleworth, W.J., Z.-L. Yang, and Arain, M.A., 1997. Aggregation rules for surface parameters in global models. *Hydrology and Earth System Sciences.* 1:217-226, 1997.
- Tatarskii, V.I., 1961. *Wave propagation in a turbulent medium*, McGraw-Hill Book

Company, INC., New York, 285 pp.

Wieringa, J., 1986. Roughness dependent geographical interpolation of surface wind speed averages. *Quart. J. R. Meteorol. Soc.*, 112:867-889.

Figure Captions

Figure 1: Location map showing the different instrumented sites in the Mexican part of the San Pedro Basin

Figure 2: Ground elevation and scintillometer transmitter/receiver heights along the transect spanning the degraded grass and the mesquite patches.

Figure 3: Comparison between scintillometer-based and Eddy correlation-based momentum flux over the degraded grassland patch.

Figure 4: Comparison between scintillometer-based and Eddy correlation-based momentum flux over the mesquite patch.

Figure 5: Comparison between scintillometer-based and Eddy correlation-based sensible heat flux over the degraded grassland patch.

Figure 6: Comparison between scintillometer-based and Eddy correlation-based sensible heat flux over the mesquite patch.

Figure 7: Comparison between scintillometer-based and Eddy correlation-based area-average momentum flux (transect).

Figure 8: Comparison between scintillometer-based and Eddy correlation-based area-average sensible heat flux (transect).

Table 1a: Effective scintillometer height, the corresponding time average of sensible heat flux and the result of the linear regression between measured and simulated heat flux values associated with each method over the degraded grass patch

Method	Effective height (m)	Average H in Wm^{-2}	Slope	STD Error	R^2
Method 1	6.14	210.97	1.15	29.58	0.93
Method 2	3.44	169.11	0.93	34.53	0.86
Method 3	6.02	208.99	1.14	29.78	0.93

Table 1b: Effective scintillometer height, the corresponding time average of sensible heat flux and the result of the linear regression between measured and simulated heat flux values associated with each method over the mesquite patch.


Method	Effective height (m)	Average H in Wm^{-2}	Slope	STD Error	R^2
Method 1	10.73	251.97	1.15	37.76	0.90
Method 2	9.51	233.40	1.15	40.88	0.87
Method 3	10.50	241.71	1.10	39.15	0.89

Table 1c: Effective scintillometer height, the corresponding time average of sensible heat flux and the result of the linear regression between measured and simulated heat flux values associated with each method over the entire transect.

Method	Effective height (m)	Average H in Wm^{-2}	Slope	STD Error	R^2
Method 1	12.46	234.04	0.98	21.77	0.90
Method 2	6.10	175.36	0.74	30.93	0.75
Method 3	11.38	221.91	0.93	22.73	0.88


Fig. 1

Site Location.

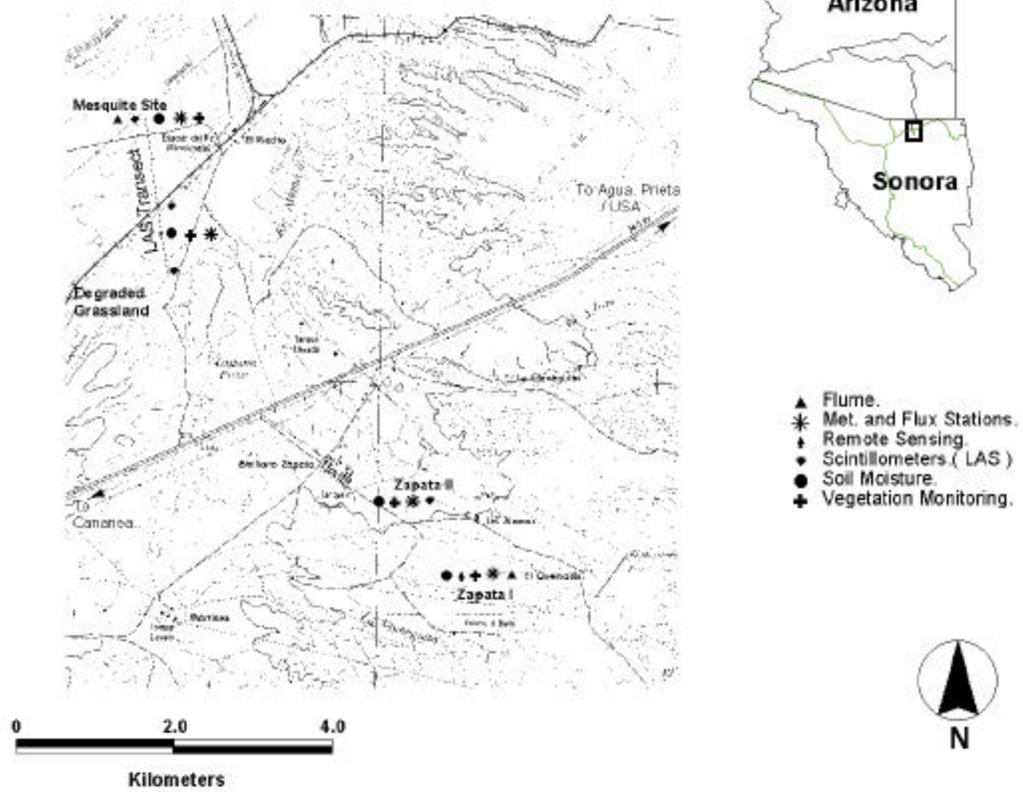


Chehbouni (Ref# S-09)

Fig. 2

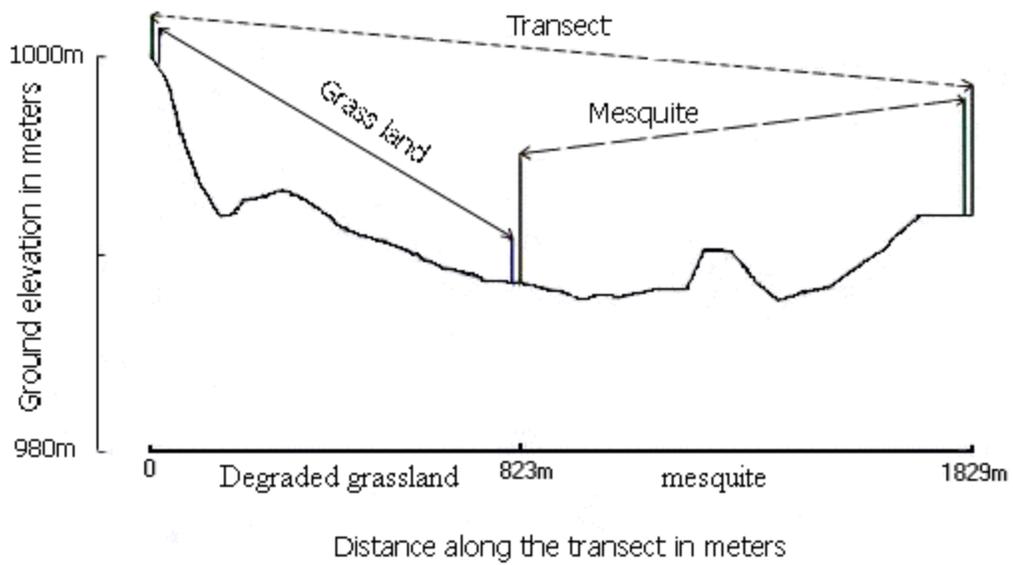


Chehbouni (Ref# S-09)

Fig. 3

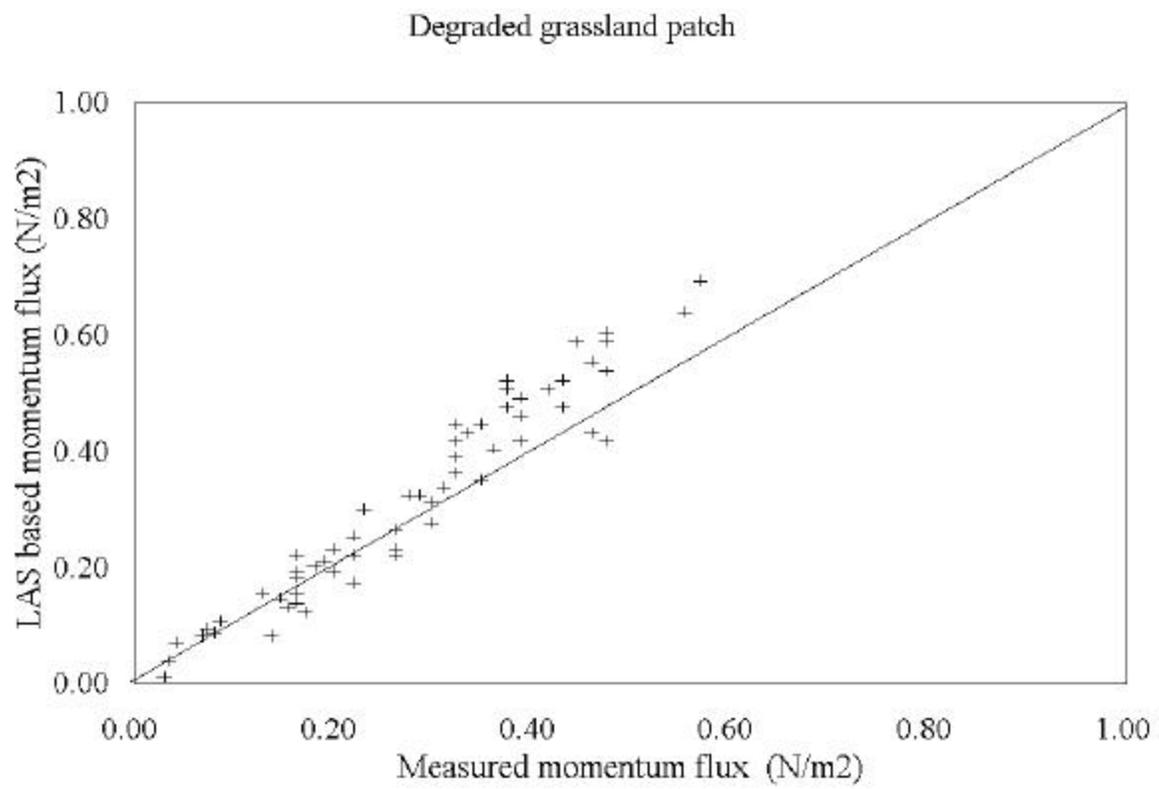


Chehbouni (Ref# S-09)

Fig. 4

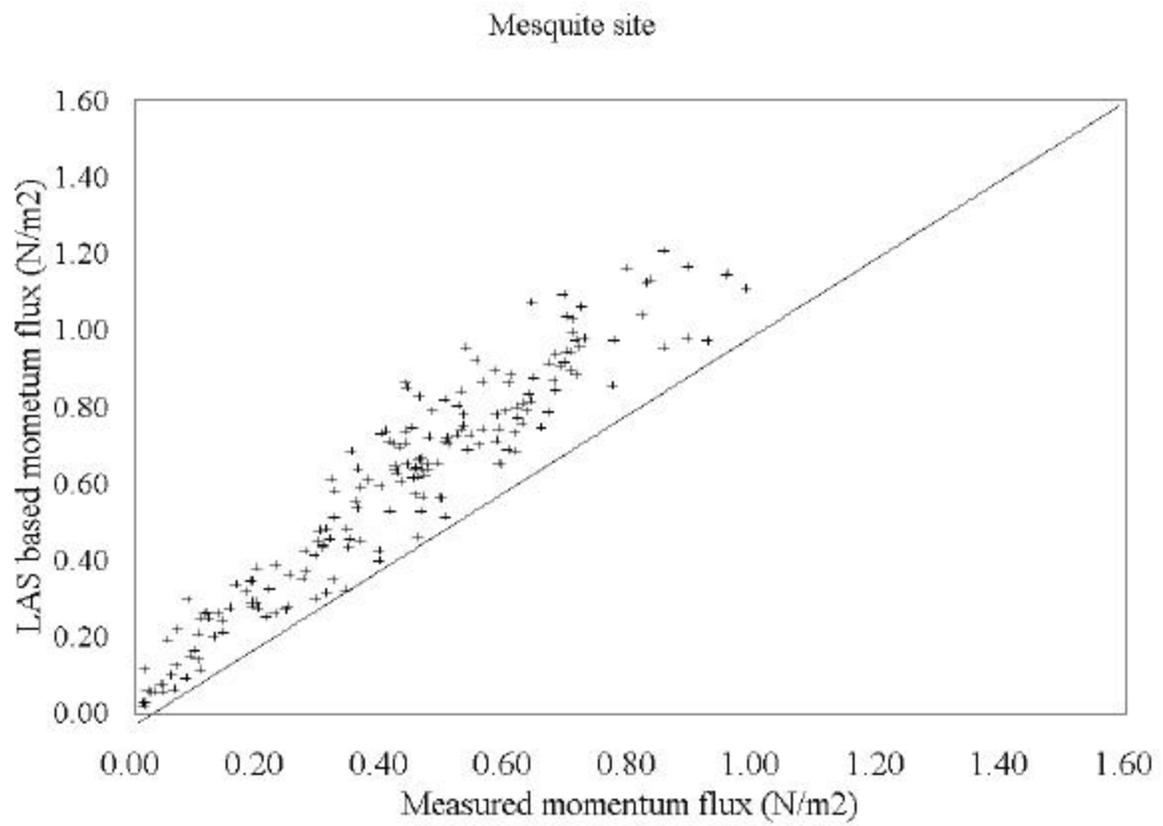

Chehbouni (Ref# S-09)

Fig. 5

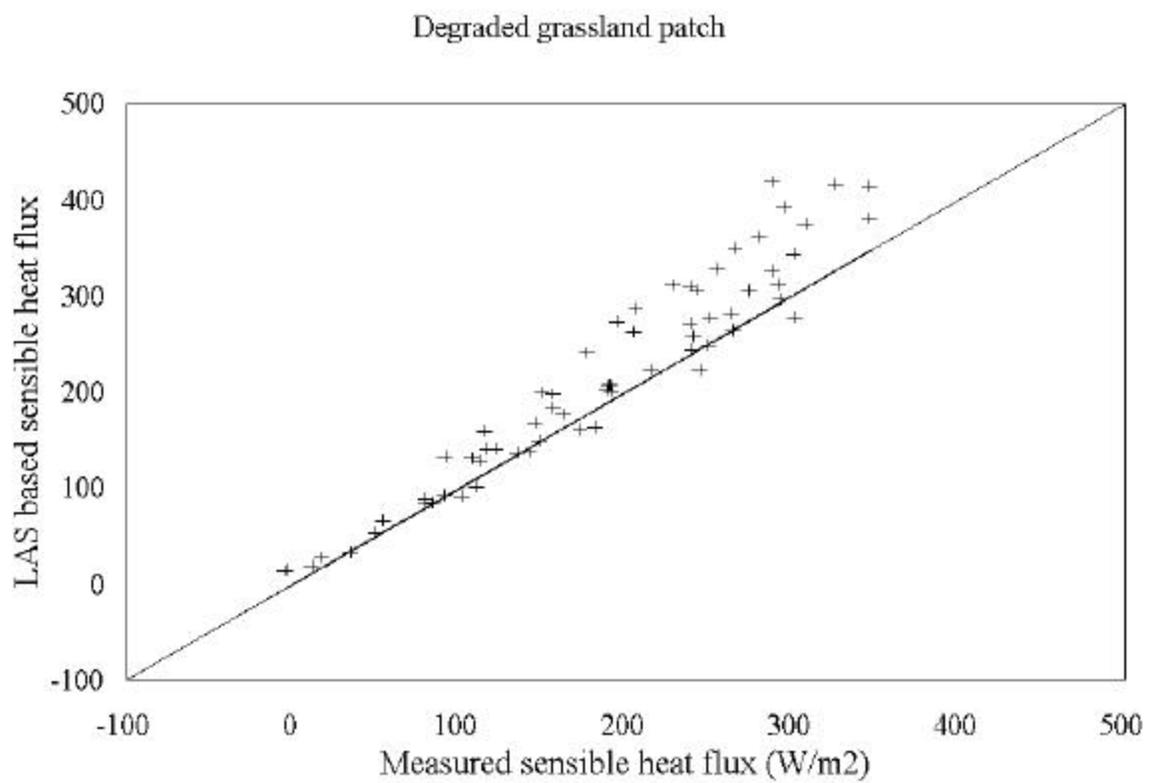

Chehbouni (Ref# S-09)

Fig. 6


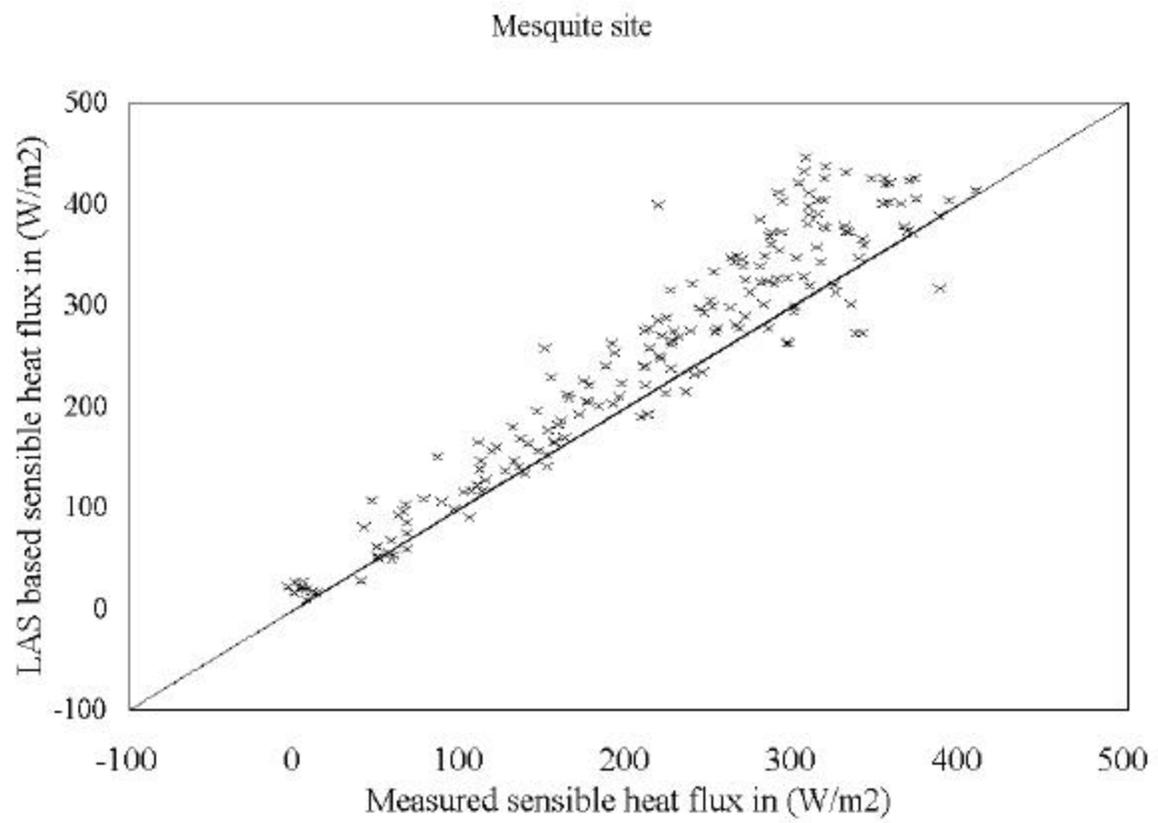


Fig. 7



Chehbouni (Ref# S-09)

Fig. 8

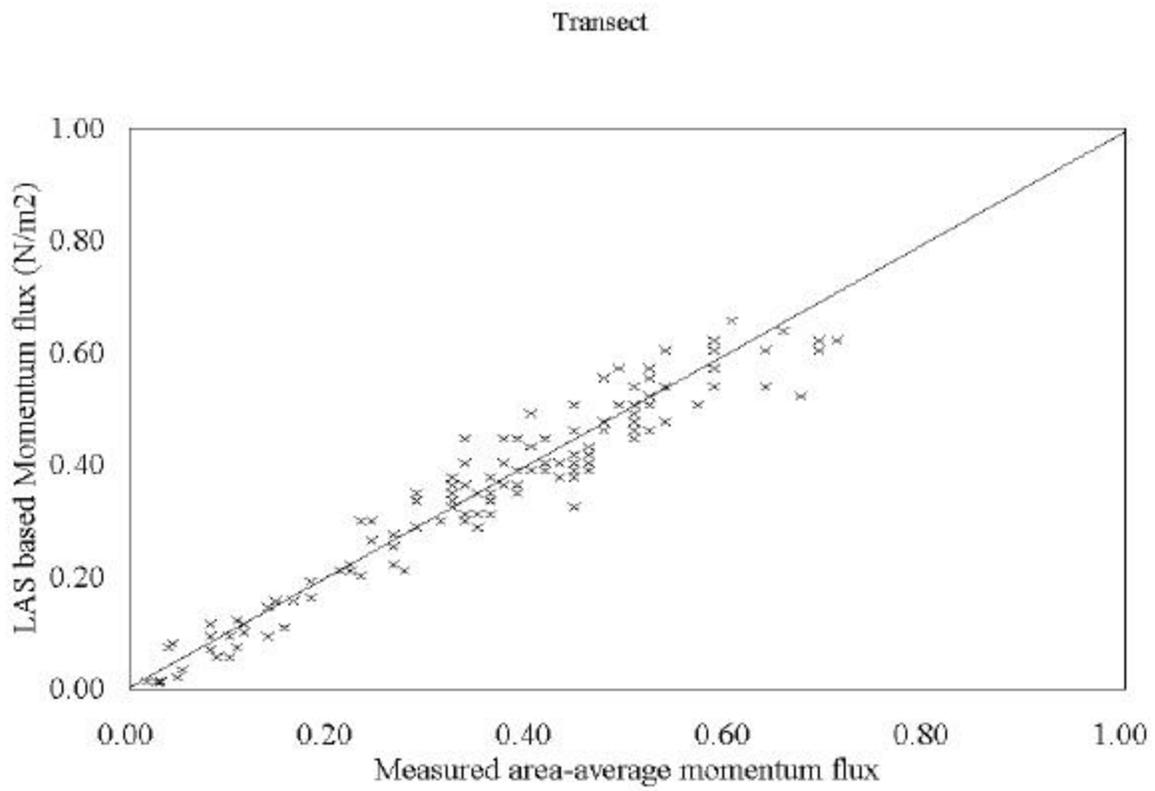