

Agriculture

and the
Environment

The 1991 Yearbook of Agriculture

ing equipment, and pesticides have been dramatic over the past two decades and should continue into the future. Many believe that growing crops using conservation tillage is more sustainable on

sloping cropland than a conventional moldboard plow system that buries the protective crop residue and leaves the soil surface vulnerable to severe soil erosion. ■

How Research Improves Land Management

4

by L.D. Meyer, Agricultural Engineer, National Sedimentation Laboratory, ARS, USDA, Oxford, MS; and K.G. Renard, Hydraulic Engineer, Aridland Watershed Management Research Unit, ARS, USDA, Tucson, AZ

Productive soil is one of our Nation's greatest natural resources, so maintaining land productivity and preventing environmental degradation from soil erosion are high-priority national goals. A century ago, essentially no soil conservation research was conducted in the United States; today America is the world leader. During the same period, American farming methods have changed tremendously, and soil erosion problems have expanded and intensified. The part that research has played in improving management of our billion acres of productive land is an important part of our agricultural history.

Rainfall and Erosion

Another key resource that makes land productive is rainfall.

Between 100 million and 1 billion gallons of rain fall annually on each square mile of U.S. land. This water is essential for crop production, but it may also cause problems such as soil erosion and flooding.

Rain falls as drops averaging less than one-eighth inch in diameter, but each drop strikes the land as a tiny bomb. Every year throughout most of the United States, more than a quadrillion (1,000,000,000,000,000) drops strike each square mile of land with the impact energy of thousands of tons of TNT. The impact energy of rain falling on the State of Mississippi, for example, annually equals the energy of a thousand 1-megaton bombs or 1 billion tons of TNT.

When raindrops fall on unprotected soil, they start the erosion

process. These drops that is then transported slope by runoff, the rain that is not absorbed by Not only does this runoff raindrop-detached soil additional erosion itself water is lost to crop production. Runoff from fields and streams and rivers in Mississippi for instance, averages nearly trillion gallons annually.

Wind Erosion

Although the major erosion problem in most parts of the United States (and the focus of this chapter) is erosion from rainstorms, wind erosion is a serious hazard. Wind erosion results from strong winds across inadequately protected soil, and it usually is w



Each drop of rain strikes like a tiny bomb. Every year throughout most of the United States, more than a quadrillion (1,000,000,000,000,000) drops strike each square mile of land with the impact energy of thousands of tons of TNT. USDA #18W0079

ing cropland than a conven-
al moldboard plow system
buries the protective crop
lue and leaves the soil
ace vulnerable to severe soil
ion. ■

es

4

edimentation Laboratory, ARS,
: Engineer, Aridland Watershed
on, AZ

veen 100 million and 1 billion
ons of rain fall annually on
1 square mile of U.S. land.
s water is essential for crop
luction, but it may also cause
blems such as soil erosion and
ding.

ain falls as drops averaging
than one-eighth inch in
eter, but each drop strikes
land as a tiny bomb. Every
r throughout most of the
ted States, more than a qua-
trillion (1,000,000,000,000,000)
ps strike each square mile of
d with the impact energy of
ousands of tons of TNT. The
act energy of rain falling on
State of Mississippi, for
mple, annually equals the
rgy of a thousand 1-megaton
bs or 1 billion tons of TNT.
When raindrops fall on unpro-
ed soil, they start the erosion

process. These drops detach soil
that is then transported down-
slope by runoff, the rainfall excess
that is not absorbed by the soil.
Not only does this runoff carry
raindrop-detached soil and cause
additional erosion itself, but the
water is lost to crop production.
Runoff from fields and forests to
streams and rivers in Mississippi,
for instance, averages nearly 20
trillion gallons annually.

Wind Erosion

Although the major erosion
problem in most parts of the
United States (and the focus of
this chapter) is erosion caused by
rainstorms, wind erosion is also a
serious hazard. Wind erosion
results from strong winds blowing
across inadequately protected
soil, and it usually is worst during



Each drop of rain strikes like a tiny bomb. Every
year in the United States, more than a quadrillion
raindrops strike each square mile of land with the
impact energy of thousands of tons of dynamite.
USDA 91BW0679

droughty conditions. The famous
Dust Bowl of the Great Plains
during the 1930's was a period of
unusually severe wind erosion.

Erosion Research

In the 1930's, the Nation's rapidly
deteriorating land resources—and
the highly conspicuous Dust
Bowl—prompted the Federal
Government to launch a major
soil conservation research effort.
Its purpose was to learn more
about how rainfall, runoff, and
wind affect erosion in the United
States. This research has been
largely supported by Federal and
State funds through USDA and
State agricultural experiment
stations.

The primary concern during
the early years of research was the
consequences of excessive soil
erosion on crop yields. By the end
of the 1930's, research data plus
farmers' experiences showed
conclusively that excessive
erosion seriously reduces produc-
tivity, so researchers proceeded to
evaluate erosion rates for typical
land use situations and to develop
erosion control technology.

During the 1940's and 1950's,
measurements of different agricul-
tural conditions identified those
that permitted serious erosion and
those that were effective in
conserving soil. Erosion-control
practices such as terracing,
strip cropping, year-round vegeta-
tive cover, and windbreaks were
developed to fit farming proce-

REPRINT

dures and equipment. Other research was directed toward predicting erosion rates for specific soil, topography, cropping system, and climatic conditions of individual fields. These efforts culminated in development of the USLE (Universal Soil Loss Equation) and the WEE (Wind Erosion Equation). Both were developed by scientists with USDA's Agricultural Research Service (ARS) and Soil Conservation Service (SCS), the USLE in cooperation with Purdue University and the WEE with Kansas State University.


USLE, RUSLE, and WEE

The USLE and its recent revision (RUSLE) quantify annual soil loss as the product of six factors that

represent the following:

- Rainfall/runoff erosiveness
- Soil erodibility
- Slope length
- Slope steepness
- Cropping and management practices
- Supporting conservation practices

Generally, USLE values show that a year of rainstorms in the Southeastern United States totals twice the erosiveness of those in the Midwest. High silt soils with low organic matter are 50 percent more erodible than those with high organic matter and twice as erodible as soils with high clay or sand content. Fields of 7-percent slope have twice the erosion of fields with 4-percent slope, and 11-percent slopes have four times

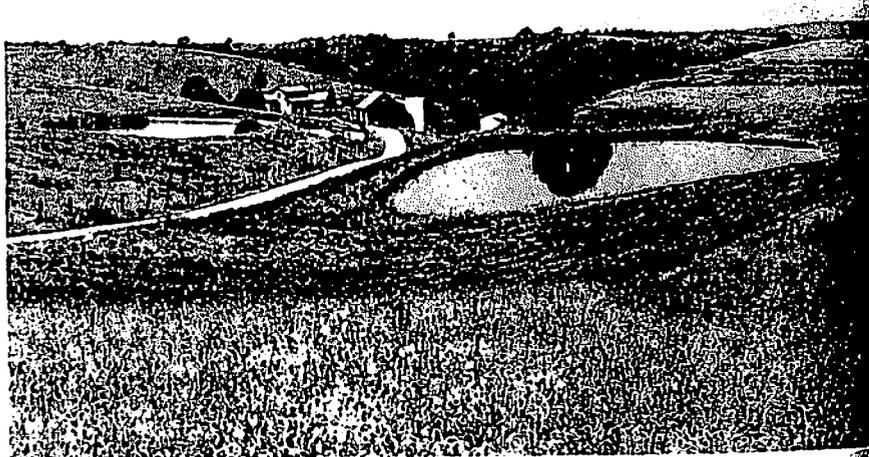

An increased understanding of fundamental soil erosion principles and processes can help in selecting effective soil conservation practices, as on this farm near Philadelphia, OH. The pond catches runoff from the land above and helps protect the land below from serious soil erosion.
Erwin Cole/USDA OH-60961

the erosion of 4-percent slopes. And no-till corn has only half the erosion of no-till soybean and one-fourth that of conventionally tilled corn.

By selecting appropriate USLE/RUSLE values for specific situations, conservation planners can recommend production methods for individual fields that limit soil losses to rates that maintain productive potential of the land indefinitely.

Similarly, the WEE predicts wind erosion rates as the function of five factors that represent the following:

- Soil erodibility
- Soil ridge roughness
- Climate
- Field length
- Vegetative cover

Since the USLE and WEE were first introduced, their systematic approach has had a tremendous effect on erosion technology and conservation planning. Their equations and adaptations of them are used worldwide.

Understanding Erosion

During the 1960's and 1970's, scientists emphasized fundamental research designed to better understand the principles and processes of soil erosion by water and wind. They analyzed and quantified the companion but very different processes of raindrop-caused erosion and runoff-caused erosion. The aerodynamics of wind in relation to soil detach-

the following:
 /runoff erosiveness
 odibility
 length
 teepness
 ng and management
 es
 ting conservation
 es
 ily, USLE values show
 r of rainstorms in the
 ern United States totals
 erosiveness of those in
 est. High silt soils with
 ic matter are 50 percent
 ible than those with
 nic matter and twice as
 s soils with high clay or
 ent. Fields of 7-percent
 e twice the erosion of
 h 4-percent slope, and
 t slopes have four times



nd processes can help in selecting
 ia, OH. The pond catches runoff
 oil erosion.

the erosion of 4-percent slopes.
 And no-till corn has only half the
 erosion of no-till soybean and
 one-fourth that of conventionally
 tilled corn.

By selecting appropriate USLE/
 RUSLE values for specific situa-
 tions, conservation planners can
 recommend production methods
 for individual fields that limit soil
 losses to rates that maintain
 productive potential of the land
 indefinitely.

Similarly, the WEE predicts
 wind erosion rates as the function
 of five factors that represent the
 following:

- Soil erodibility
- Soil ridge roughness
- Climate
- Field length
- Vegetative cover

Since the USLE and WEE were
 first introduced, their systematic
 approach has had a tremendous
 effect on erosion technology and
 conservation planning. Their
 equations and adaptations of them
 are used worldwide.

Understanding Erosion

During the 1960's and 1970's,
 scientists emphasized fundamen-
 tal research designed to better
 understand the principles and
 processes of soil erosion by water
 and wind. They analyzed and
 quantified the companion but
 very different processes of rain-
 drop-caused erosion and runoff-
 caused erosion. The aerodynamics
 of wind in relation to soil detach-

ment and transport were defined.

The effects of different types of
 plant cover, tillage, and cropping
 systems were evaluated on
 erosion plots and watersheds,
 using rainfall simulators and
 wind tunnels. Various types of
 conservation tillage were devel-
 oped, evaluated, and found to
 greatly reduce both water and
 wind erosion from land during
 intensive cropping. Scientists also
 identified and quantified soil and
 sediment characteristics that
 affect erosion rates and sediment
 pollution potential.



Using a rainfall simulator, ARS scientists
 conduct erosion research by collecting and
 analyzing the runoff.
 Tim McCabe/USDA 0887X0840-33

RENIARD

Model Development

During the 1980's, the knowledge gained from past experiments and fundamental studies provided the basis for developing mathematical models to describe erosion over a wide range of specific conditions and to improve erosion prediction and control methods. About the same time, the environmental movement gave impetus to an expanded research effort to understand off-site effects of soil erosion and the potential for chemical pollution resulting from it. Models such as CREAMS (Chemicals, Runoff, and Erosion from Agricultural Management Systems) were formulated, which included hydrologic, erosion, pesticide, and nutrient components. Such models incorporated major advances in describing the physical processes involved in soil erosion, sediment transport and deposition, and chemical transport.

Most recently, the WEPP (Water Erosion Prediction Project) model has been developed by ARS, SCS, the FS, the Department of the Interior's Bureau of Land Management, and cooperating universities as the next-generation water-erosion prediction model to replace the USLE/RUSLE. The more versatile WEPP model incorporates many of the scientific advances that have been made since development of the USLE and is based on the prin-

ciples and processes of soil erosion by water.

A similar effort by ARS, SCS, and university cooperators is underway to improve the predictive capability for wind erosion, culminating in the WEPS (Wind Erosion Prediction System) model. This model is based on the fundamental principles of wind erosion physics associated with climate, soil, topography, and cropping/management systems that affect sediment detachment, transport, and deposition.

Soil Conservation Practices

An increased understanding of fundamental soil erosion principles and processes also helps in selecting effective soil conservation practices for specific land conditions. Effective erosion control involves the following:

- Dissipating raindrop, runoff, and wind-induced erosive forces on nonerodible materials rather than erodible soil
- Reducing the amount of runoff
- Slowing runoff or wind velocities
- Improving soil characteristics that resist the erosive forces
- Preventing massive gully and channel erosion
- Decreasing wind access to barren soil

By identifying the processes that are causing the primary erosion hazards, the best individual management practice or combination of practices (BMP)

may be selected for a particular situation.

Cropland Erosion Control

For conditions where serious erosion is due primarily to rain drop impact or intense winds, protection of the soil surface by plant residue mulches or grove vegetation can be very effective. Keeping the soil covered during periods of critical erosion hazard is especially important, so minimizing tillage and using crop systems that disturb land only during those times of the year when major rainstorms or wind storms are uncommon should be emphasized. Use of close-grow vegetation or narrower crop rows instead of wide-row crops may also help reduce erosion.

On land where the topography and cropping system are susceptible to serious erosion by concentrated runoff, runoff reduction and management deserve high priority. Practices such as dense vegetation and plant residues that reduce soil surface sealing and increase infiltration will be very effective in reducing runoff. Runoff management can be achieved by routing runoff around the slope at nonerosive velocities using practices such as terraces and row-grade control. When runoff is so great that it cannot be managed in this way, detention structures and/or vegetated waterways are effective.

processes of soil water. An effort by ARS, SCS, university cooperators is to improve the predictability for wind erosion, using the WEPS (Wind Erosion Prediction System). This model is based on the fundamental principles of wind physics associated with soil, topography, and management systems of sediment detachment, and deposition.

Conservation Practices
A good understanding of soil erosion principles also helps in effective soil conservation practices for specific lands. Effective erosion control involves the following: reducing raindrop, runoff, and wind-induced erosive forces on nonerodible materials and erodible soil; reducing the amount of runoff; reducing runoff or wind erosion; understanding soil characteristics; identifying the erosive forces; reducing massive gully and rill erosion; reducing wind access to soil; and identifying the processes. Understanding the primary hazards, the best individual management practice or combination of practices (BMP's)

may be selected for a particular situation.

Cropland Erosion Control

For conditions where serious erosion is due primarily to raindrop impact or intense winds, protection of the soil surface by plant residue mulches or growing vegetation can be very effective. Keeping the soil covered during periods of critical erosion hazards is especially important, so minimizing tillage and using cropping systems that disturb land only during those times of the year when major rainstorms or windstorms are uncommon should be emphasized. Use of close-growing vegetation or narrower crop rows instead of wide-row crops may also help reduce erosion.

On land where the topography and cropping system are susceptible to serious erosion by concentrated runoff, runoff reduction and management deserve high priority. Practices such as dense vegetation and plant residues that reduce soil surface sealing and increase infiltration will be very effective in reducing runoff. Runoff management can be achieved by routing runoff around the slope at nonerosive velocities using practices such as terraces and row-grade control. When runoff is so great that it cannot be managed in this way, detention structures and/or vegetated waterways are effective.

Erosion from soils that erode as very fine sediment is very difficult to control once the soil is detached. Therefore, vegetation and mulches that provide good soil cover to prevent soil detachment are most effective. In contrast, coarse-textured sediment can be more easily trapped by vegetation, rough-tilled land, contoured rows, terraces, or detention structures. Even with coarse-textured soils, preventing detachment by soil cover is still the most desirable practice, but these sediment-trapping practices will also help prevent major losses.

Soil losses from land with steep or long slopes are difficult to control once the soil has been detached, so maintenance of good soil cover to prevent raindrop and runoff erosion is very important. In contrast, soil losses from land with relatively flat slopes can often be reduced by management practices, such as dense vegetation and graded rows, which slow or store surface runoff.

Effective conservation practices for land subject to wind erosion include vegetative cover (especially stubble from the previous crop), windbreaks and wind barriers, rough and cloddy soil surfaces, and tillage perpendicular to the prevailing wind direction.

Other Erosion Problems

Although reduced productivity is the most widespread consequence of excessive erosion, soil conser-

REFWARD

vation research is not limited to hazards caused by rainstorms or windstorms on cropland. Research is also underway on rangelands, where precipitation is often inadequate for maintaining sufficient vegetation to protect against wind and water erosion losses of the limited soil research sources. Other studies concern erosion from irrigation of sloping fields, on forest lands, and on nonagricultural land such as urban areas, construction sites, highway slopes, and surface-mined land.

Farming Changes and Research on New Problems

Agricultural production methods have changed tremendously since the days of the horse-drawn plow, and many of these changes have increased erosion hazards. Today's heavy mechanized equipment compacts soil and reduces infiltration. Large implements work best on long fields devoid of conservation practices that would hinder their operation, and they operate better when troublesome surface residues have been removed or buried. Absence of horses and other animals on many farms means that hay is no longer needed, so continuous row crops are grown where rotations and pastures once grew. Yet intensive use of agricultural land is necessary because American agriculture is feeding several times more people today than at

the beginning of the 20th century.

Research has demonstrated that cropping practices such as conservation tillage (see Chapter 3) can enable farmers to use modern farming methods and still control erosion. However, increased residues and pest accumulations present with conservation tillage require increased use of agricultural pesticides, an environmental tradeoff. Many cropping systems and supporting practices that benefit soil conservation are not considered economically feasible for today's farming situations.

Researchers have shown that crop production can continue without excessive soil losses on much of our Nation's erodible land if farmers adopt conservation cropping systems and properly manage their soil and water resources. However, because of circumstances that are often beyond farmers' control, only small reductions in wind and water erosion have come about in recent decades. Current research is focusing on developing conservation practices that are compatible with current agricultural methods; that enable farmers to make a reasonable profit; and that control soil losses, runoff, and other environmental hazards.

Soil erosion annually produces several billion tons of sediment from U.S. land. Such sediment has always been and continues to be, by volume, our Nation's greatest pollutant. Past erosion

has caused major losses of our Nation's soil resources, but consider "what might have been" if we had not developed a land stewardship ethic and embarked on a soil conservation research effort early in this century.

The examples given show that soil conservation research during the past half century has produced a good understanding of the complex soil erosion process and provided effective technology to predict and control soil erosion. These advances were accomplished through the efforts of dedicated Federal and State researchers and action agency

Soil Changes and To Monitor Them

by Richard W. Arnold, Director, Soil S
USDA, Washington, DC

What Are Soils?

Thousands of soils join to form the pedosphere, the thin outer covering of the surface of the Earth. Soils share the surface layer of the Earth with plants, animals and people. Soils are protective living geomembranes through which energy, nutrients, and water pass as they nourish land-based life.

Soils are the product of ecosystems and a recorder of our Earth

has caused major losses of our Nation's soil resources, but consider "what might have been" if we had not developed a land stewardship ethic and embarked on a soil conservation research effort early in this century.

The examples given show that soil conservation research during the past half century has produced a good understanding of the complex soil erosion process and provided effective technology to predict and control soil erosion. These advances were accomplished through the efforts of dedicated Federal and State researchers and action agency

specialists. Because of their expertise, the last several generations have experienced remarkable developments in soil conservation technology. Erosion prediction and control methods are now available for most soil, topographic, and rainfall situations, and even better technology promises to emerge from current studies. Certainly, soil and water conservation research must be an important component of all future efforts to conserve our productive soil resources, prevent damage from eroded sediment, and maintain environmental quality. ■

Soil Changes and New Ways To Monitor Them

5

by Richard W. Arnold, Director, Soil Survey Division, Soil Conservation Service, USDA, Washington, DC

What Are Soils?

Thousands of soils join to form the pedosphere, the thin outer covering of the surface of the Earth. Soils share the surface layer of the Earth with plants, animals, and people. Soils are protective living geomembranes through which energy, nutrients, and water pass as they nourish land-based life.

Soils are the product of ecosystems and a recorder of our Earth's

history. By monitoring soil processes, we can detect patterns and relationships significant to our understanding of ecosystems and the environments in which they exist.

Soil Processes

Ecosystems can be visualized as dynamic segments of the environment, involving the biology of plants, animals, and microorganisms; the chemistry and

REWARD